

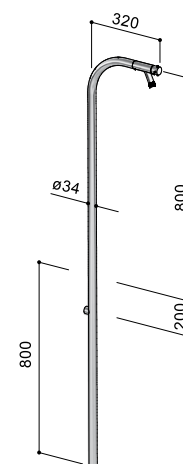


## SPRING



COL30.G

**COLONNA DA ESTERNO CON RUBINETTO DA GIARDINO, PER INSTALLAZIONE SU TERRENO**  
 OUTDOOR COLUMN WITH GARDEN TAP, FOR INSTALLATION ON GROUND  
 COLONNE D'EXTERIEUR AVEC ROBINET DE JARDIN, POUR INSTALLATION AU SOL  
 COLUMNA PARA EXTERIOR CON GRIFO PARA JARDIN, PARA INSTALACIÓN SOBRE TIERRA  
 SÄULE FÜR DEN AUSSENBEREICH, MIT GARTENHAHN, FÜR BODENEINBAU

**DOTAZIONE**

- Corpo: acciaio inox Aisi 316, spessore 3 mm
- Rubinetto di arresto in acciaio inox Aisi 316
- Raccordo portagomma

**EQUIPMENT**

- Column: inox steel Aisi 316, thickness 3 mm
- Stop tap in inox steel Aisi 316
- Hose connection

**ÉQUIPEMENT**

- Colonne: acier inox Aisi 316, épaisseur 3 mm
- Robinet d'arrêt en acier inox Aisi 316
- Raccord cannelé

**EQUIPAMIENTO**

- Columna: acero inox Aisi 316, espesor 3 mm
- Grifo de acero inox Aisi 316
- Racor manguera

**AUSSTATTUNG**

- Säule: Edelstahl Inox Aisi 316, Dicke 3 mm
- Wasserhahn aus Edelstahl Inox Aisi 316
- Anschluß für Gartenschlauch

**Alimentazione:**  
acqua fredda  
**Dati Tecnici**

Pressione d'esercizio consigliata: 1 ÷ 5 Bar  
Collegamento alla rete: ½" F

**Water supply:**  
cold water

**Technical Info**

Recommended flow pressure: 1 ÷ 5 Bar  
Connection to water supply: ½" F

**Alimentation:**  
eau froide  
**Info Technique**

Pression de service conseillée: 1 ÷ 5 Bar  
Raccords à l'alimentation: ½" F

**Alimentación:**  
agua fría

**Datos Técnicos**

Presión de trabajo aconsejada: 1 ÷ 5 Bar  
Enlace a la red: ½" H

**Versorgung:**  
kaltes Wasser

**Technische Angaben**

Empfohlener Wasserdruck: 1 ÷ 5 Bar  
Anschluß mit Wasserversorgung-Rohr: ½" F